

# **JMA LRIT**

## **Mission Specific Implementation**

Issue 7  
1 July 2010

Issue 7 for LRIT new dissemination of visible full disk in effect from 1 July 2010

Japan Meteorological Agency  
1-3-4 Otemachi, Chiyoda-ku, Tokyo, Japan, 100-8122

## DOCUMENT CONTROL

| Issue          | Date                   | Status and Changes                                                                           |                                                                                                                                                               |
|----------------|------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Issue 1        | 1 September 1997       | Original Issue                                                                               |                                                                                                                                                               |
| Issue 2        | 1 February 1998        | 1) Section 4.4.2.3<br>2) Section 8.4.1<br>3) Section 9<br>4) Section A.1.2<br>5) Section C.1 | projection name<br>spacecraft ID in VCDU-ID<br>symbol inversion in the G2 path<br>coverage of polar-stereographic projection<br>communication link parameters |
| Issue 3        | 1 July 1998            | 1) Section 5.4.3<br>2) Section 5.4.4                                                         | Key Representation<br>Key Function                                                                                                                            |
| Issue 4        | 1 June 1999            | 1) Appendix B<br>2) Appendix C                                                               | List of meteorological data/products<br>Link parameters                                                                                                       |
| Issue 5        | 1 December 2000        | 1) Section 8.4.1<br>2) Section 9<br>3) Appendix C                                            | spacecraft ID in VCDU-ID<br>No symbol inversion in the G2 path<br>Link parameters<br>Delete link budget example                                               |
| Issue 6        | 1 January 2003         |                                                                                              | Shown in the table below                                                                                                                                      |
| <u>Issue 7</u> | <u>1 December 2009</u> | <u>1) Section A.1</u><br><u>2) Section A.1.1</u>                                             | <u>Visible Image of Full Earth's Disk of normalized geostationary projection</u>                                                                              |

| CHANGE TRACEABILITY from Issue 5 to Issue 6 |                                                                                                                                                  |      |  |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------|--|
| Location of change in issue 5               | change                                                                                                                                           | Ref. |  |
| TABEL OF CONTENTS                           | - removing of 3.1.3 Meteorological Data<br>- change of section numbering 3.1.4 to 3.1.3<br>- removing of 4.5.5<br>- Change of appendix numbering |      |  |
| Section 1.2                                 | - modification of definition 'data rate'                                                                                                         |      |  |
| Section 1.3                                 | - removing of appendix B<br>- Change of appendix numbering                                                                                       |      |  |

|                 |                                                                                                                                                         |  |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                 |                                                                                                                                                         |  |
| Section 1.4.1   | - change of [AD.1] rev 2.4 to rev 2.6                                                                                                                   |  |
| Section 1.6     | - Update of MSG LRIT/HRIT Mission Specific Issue 1.0 to Issue 4.1                                                                                       |  |
| Section 2.2     | - removing of Meteorological Data                                                                                                                       |  |
| Section 3.1.1   | - removing of 'Meteorological Data'                                                                                                                     |  |
| Section 3.1.3   | - removing all text                                                                                                                                     |  |
| Section 3.1.4   | - change of Section numbering 3.1.4 to 3.1.3                                                                                                            |  |
| Section 4.2.1   | - insertion of Number of image segment files might be changed in future due to the timeliness requirement                                               |  |
| Section 4.3     | - removing Meteorological data<br>- modification of mission specific file type<br>- replacing of Table 4.1 LRIT File Types                              |  |
| Section 4.4.2.1 | - removing of '128:meteorological data'                                                                                                                 |  |
| Section 4.4.2.3 | - modification of 'COFF/LOFF'                                                                                                                           |  |
| Section 4.4.2.5 | - removing of                                                                                                                                           |  |
| Section 4.4.2.9 | - adding of 'relative to COFF/LOFF (Header Type #2)'                                                                                                    |  |
| Section 4.4.3   | - refinement of File Type vs. Header Implementation<br>- replacing Table 4-16 Use of Header Records vs. File type                                       |  |
| Section 4.5     | - removing of all Text                                                                                                                                  |  |
| Section 8.4.1   | - modification of 'packetized data rate'<br>- insertion of SC IDs MTSAT-1R and MTSAT-2<br>- adding of the 'VCDU Counter' restart from 'zero or Overlap' |  |
| Section 8.4.2   | - adding of the 'VCDU Counter' restart from 'zero or Overlap'                                                                                           |  |
| APPENDIX A      | - insertion of Number of image segment files might be changed in future due to the timeliness requirement<br>- modification of A.1.2<br>- adding of     |  |
| APPENDIX        | - removing of 'APPENDIX B'<br>- change of appendix numbering                                                                                            |  |
| APPENDIX C      | - change of appendix numbering C to B<br>- adding of Pulse shaping 'Root'                                                                               |  |
| APPENDIX D      | - change of appendix numbering D to C                                                                                                                   |  |
| APPENDIX E      | - change of appendix numbering E to D<br>- removing of TBDs VCDU-ID                                                                                     |  |

\* A title of this document was changed from 'MTSAT LRIT Mission Specific Implementation' to 'JMA LRIT Mission Specific Implementation' in the Issue 5.

## TABLE OF CONTENTS

### TABLE OF CONTENTS

### LIST OF FIGURES

### LIST OF TABLES

#### 1. INTRODUCTION

- 1.1 Purpose of the Document
- 1.2 LRIT service
- 1.3 Document Structure
- 1.4 Applicable and Reference Documentation
  - 1.4.1 Applicable Documentation
  - 1.4.2 Reference Documentation
- 1.5 Conventions
- 1.6 Acknowledgment

#### 2. INTRODUCTION TO THE OSI REFERENCE MODEL

- 2.1 Communication Concept
- 2.2 Dissemination

#### 3. APPLICATION LAYER

- 3.1 Input Data
  - 3.1.1 General
  - 3.1.2 Image Data
  - 3.1.3 Service Messages

#### 4. PRESENTATION LAYER

- 4.1 Structure of LRIT Files
- 4.2 Segmentation of LRIT Files
  - 4.2.1 Segmentation of Image Data
- 4.3 Overview of LRIT File Types
- 4.4 LRIT File Header Types
  - 4.4.1 General
  - 4.4.2 Definition of Header Types
    - 4.4.2.1 Header Type #0 - Primary Header
    - 4.4.2.2 Header Type #1 - Image Structure
    - 4.4.2.3 Header Type #2 - Image Navigation
    - 4.4.2.4 Header Type #3 - Image Data Function
    - 4.4.2.5 Header Type #4 - Annotation
    - 4.4.2.6 Header Type #5 - Time Stamp
    - 4.4.2.7 Header Type #6 - Ancillary Text
    - 4.4.2.8 Header Type #7 - Key Header
    - 4.4.2.9 Header Type #128 - Image Segment Identification
    - 4.4.2.10 Header Type #129 - Encryption key Message Header
  - 4.4.3 File Type vs. Header Implementation

#### 4.5 Detailed File Type Description

##### 4.5.1 File Type #0 - Image Data

###### 4.5.1.1 Image Data

###### 4.5.1.2 Overlay Data

##### 4.5.2 File Type #1 - GTS Message

##### 4.5.3 File Type #2 - Alphanumeric Text

##### 4.5.4 File Type #3 - Encryption Key Message

### 5. SESSION LAYER

#### 5.1 General

#### 5.2 Input to Session Layer

#### 5.3 Compression

##### 5.3.1 General

##### 5.3.2 Introduction to Lossy JPEG Compression

##### 5.3.3 Introduction to Lossless JPEG Compression

##### 5.3.4 MTSAT Mission specific JPEG Implementation

###### 5.3.4.1 Mission specific JPEG Structure and supported Modes

###### 5.3.4.2 JPEG Frame Header Structure

###### 5.3.4.3 JPEG Scan Header Structure

###### 5.3.4.4 Structure of Table and Miscellaneous Marker Segments

#### 5.4 Encryption

##### 5.4.1 Encryption Principle

##### 5.4.2 Key Definition

##### 5.4.3 Key Representation

##### 5.4.4 Key Function

##### 5.4.5 Encryption Key Message File

#### 5.5 Session Layer Output

### 6. TRANSPORT LAYER

#### 6.1 General

#### 6.2 Source Packetization

##### 6.2.1 Source Packet Structure

#### 6.3 Transport Layer Output

### 7. NETWORK LAYER

#### 7.1 Input to Network Layer

#### 7.2 General

#### 7.3 Network Layer Processing

#### 7.4 Output of Network Layer

### 8. DATA LINK LAYER

#### 8.1 Input to Data Link Layer

#### 8.2 General

#### 8.3 VCLC Sub-layer Processing

##### 8.3.1 Fill Packet Generation

#### 8.4 VCA Sub-layer Processing

##### 8.4.1 VCDU Assembly

8.4.2 'Fill VCDU' Generation

8.4.3 Reed-Solomon Coding

8.4.4 Randomization

8.4.5 Sync Marker Attachment

8.4.6 Serialization and Output of the Data Link Layer

## 9. PHYSICAL LAYER

APPENDIX A - FILE FORTMAT OF IMAGE DATA

APPENDIX B - MTSAT LRIT SATELLITE TO GROUND INTERFACE

APPENDIX C - LIST OF ABBREVIATIONS

APPENDIX D - LIST OF TBDS AND TBCS

## LIST OF FIGURES

|             |                                                           |
|-------------|-----------------------------------------------------------|
| Figure 4-1  | LRIT File Structure                                       |
| Figure 4-2  | MTSAT LRIT image data file structure of full Earth's disk |
| Figure 5-1  | LRIT File structure with compressed data field            |
| Figure 5-2  | Lossy JPEG Compression Scheme                             |
| Figure 5-3  | JPEG Lossless Image Compression Scheme                    |
| Figure 5-4  | JPEG structure of compressed image data                   |
| Figure 5-5  | SOF structure                                             |
| Figure 5-6  | SOS structure                                             |
| Figure 5-7  | Quantization table structure                              |
| Figure 5-8  | Huffman table structure                                   |
| Figure 5-9  | Encryption Principle                                      |
| Figure 5-10 | DES Key decomposition                                     |
| Figure 5-11 | Function Diagram                                          |
| Figure 5-12 | Encryption Key Message File                               |
| Figure 5-13 | LRIT Session Protocol Data Unit ( S_PDU )                 |
| Figure 6-1  | Source Packet Structure ( TP_PDU )                        |
| Figure 8-1  | M_PDU Structure                                           |
| Figure 8-2  | VCDU Structure                                            |
| Figure 8-3  | VCDU Primary Header                                       |
| Figure 8-4  | CVCDU Structure                                           |

## LIST OF TABLES

|            |                                     |
|------------|-------------------------------------|
| Table 2-1  | LRIT ISO/OSI Layer Functionality    |
| Table 4-1  | LRIT File Types                     |
| Table 4-2  | Adaptation of LRIT Header Types     |
| Table 4-3  | Primary Header                      |
| Table 4-4  | Image Structure                     |
| Table 4-5  | Image Navigation                    |
| Table 4-6  | Image Data Function                 |
| Table 4-7  | Annotation                          |
| Table 4-8  | Time Stamp                          |
| Table 4-9  | Ancillary Text                      |
| Table 4-10 | Key Header                          |
| Table 4-11 | Image Segment Identification        |
| Table 4-12 | Encryption key Message Header       |
| Table 4-13 | Use of Header Records vs. File Type |
| Table 5-1  | Frame Header Structure              |
| Table 5-2  | Scan Header Structure               |
| Table 5-3  | DQT Marker                          |
| Table 5-4  | DHT Marker                          |
| Table 6-1  | Application Process Identifiers     |

## 1. INTRODUCTION

### 1.1 Purpose of the Document

A Global Specification for Low Rate and High Rate Information Transmission (LRIT/HRIT) [AD.1] has been agreed by the Co-ordination Group for Meteorological Satellites (CGMS). The global specification is based on the ISO standard 7498 (OSI Reference Model) [RD.1] and the CCSDS recommendations of Advanced Orbiting Systems (AOS) [RD.2]. It defines the structure and the formatting of the LRIT/HRIT files and the processing and transport protocols of all OSI layers applicable to all geostationary meteorological spacecraft.

The purpose of the document, MTSAT LRIT Mission Specific Implementation, is the specification of the more detailed communication structure applied to the low rate transmission service of meteorological mission of the MTSAT (Multi-functional Transport SATellite).

This document defines the formatting manner from the view of the transmitting site; it further implies function from the receiving side (User Stations) point of view.

### 1.2 LRIT Service

The mission shall be named LRIT (Low Rate Information Transmission) if the communication link provides a data rate below 256k bit/s. If the rate is greater than or equal to 256k bit/s, the mission shall be named HRIT (High Rate Information Transmission).

The MTSAT dissemination service provides the LRIT service. The service is performed via one physical channel of the MTSAT with a data rate of 75 kilo symbols per second.

### 1.3 Document Structure

A brief description of the contents of each of the sections is given below:

|                 |                                                                                                                     |
|-----------------|---------------------------------------------------------------------------------------------------------------------|
| Section 2       | provides an overview of the OSI layer reference model and its particular functionality.                             |
| Section 3       | presents the data to be disseminated via MTSAT LRIT.                                                                |
| Section 4       | introduces to the LRIT file structure in general and defines the mission specific file types and secondary headers. |
| Section 5       | contains the required details about the compression and encryption algorithms.                                      |
| Sections 6 to 8 | summarize the mechanisms of formatting the data into source packets and transfer frames.                            |
| Section 9       | defines the MTSAT mission specific parameters of the physical layer.                                                |
| Appendix A      | shows the file format of image data to be disseminated via the LRIT                                                 |

|            |                                                                  |
|------------|------------------------------------------------------------------|
|            | dissemination channel                                            |
| Appendix B | defines the parameters of satellite to ground communication link |
| Appendix C | contains list of abbreviations used in this document             |
| Appendix D | contains list of TBDs, TBCs                                      |

The handling of failure cases and the utilization of dissemination data are not covered by this document.

## 1.4. Applicable and Reference Documentation

### 1.4.1 Applicable Documentation

[AD.1]CGMS: 'LRIT/HRIT Global Specification', Rev 2.6.August 1999

### 1.4.2 Reference Documentation

- [RD.1] ISO: 'Information Processing System - Open System Interconnection - Basic Reference Model', ISO standard 7498, Feb. 1982
- [RD.2] CCSDS: 'Advanced Orbiting Systems, Networks and Data links: Architectural Specification', CCSDS Recommendation 701.0-B2, Nov. 1992
- [RD.3] WMO: 'WMO Manual on the Global Telecommunications System', Publication number 386, 1992
- [RD.4] CCSDS: 'Time code formats', CCSDS recommendation 301.0-B-1 April 1990
- [RD.5] ISO: 'Information Technology - Digital Compression and Coding of Continuous-tone Still Image - Requirements and Guidelines, Compliance Testing and Extensions', ISO standards 10918-1, 10918, DIS 10913-3
- [RD.6] Data Encryption Standard (DES), Federal Information Processing Standard (FIPS) PUB 46-2, U.S. Dept. of Commerce, National Institute of Standards and Technology, 30/12/93
- [RD.7] DES Modes of Operation, FIPS PUB 81, U.S. Dept. of Commerce, National Institute of Standards, 2/12/1980
- [RD.8] CCSDS: 'Telemetry channel coding', CCSDS recommendation 101.0-B-3, May 1992

## 1.5 Conventions

Data types and encoding rules given in this document follow the specifications of [AD.1]

## **1.6 Acknowledgment**

This document is based on:

MSG LRIT/HRIT Mission Specific Implementation, EUMETSAT MSG/SPE/057, Issue 4.1,9 March 2001

This is prepared for MTSAT LRIT dissemination service.

JMA would like to express its sincere appreciation for the cooperation and assistance of EUMETSAT in preparing this document.

## 2. INTRODUCTION TO THE OSI REFERENCE MODEL

### 2.1 Communication Concept

This document conforms to [AD.1] which is based on the OSI Reference Model as defined in ISO 7498 [RD.1] and the CCSDS AOS, Network and Data Links, Architectural Specification [RD.2].

Table 2-1 presents the ISO/OSI layers from top to bottom and the equivalent functionality included in the LRIT communication model from the view of the transmission service.

| OSI Layer          | Layer Functionality                                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| application layer  | acquisition of application data                                                                                                                                                |
| presentation layer | image segmentation<br>formatting to LRIT file structure                                                                                                                        |
| session layer      | compression (if required)<br>encryption (if required)                                                                                                                          |
| transport layer    | determination of APID<br>split of files into source packets                                                                                                                    |
| network layer      | determination of VC-ID                                                                                                                                                         |
| data link layer    | assembly of source packets into M_PDUs<br>multiplexing<br>assembly of VCDUs<br>generation of 'idle frame'<br>Reed-Solomon coding<br>randomization<br>attachment of sync marker |
| physical layer     | serialization<br>viterbi coding<br>modulation                                                                                                                                  |

**Table 2-1      LRIT ISO/OSI Layer Functionality**

### 2.2 Dissemination

The image dissemination is no longer governed by fixed time slots as WEFAX. Start and end time of dissemination for a LRIT file is not bound to absolute time references. The dissemination service will maintain in principle a regular, periodic distribution of the image data. Service Messages will be interleaved with the image data according to a priority scheme.

### **3. APPLICATION LAYER**

#### **3.1 Input Data**

##### **3.1.1 General**

The MTSAT LRIT service deals with the following application data:

- Image Data
- Service Messages

A brief description of the application data can be found in the sections 3.1.2 to 3.1.3

##### **3.1.2 Image Data**

Image data corresponds to the geo-located and radiometrically pre-processed image data ready for further processing and analysis.

A list and description of these data is contained in Appendix A.

##### **3.1.3 Service Messages**

Service messages are data which are to provide the end-users with regular operational information (e.g. administrative and encryption key messages).

## 4. PRESENTATION LAYER

The presentation layer defines the uniform formatting of data and image segmentation. This layer receives the data as defined in section 3 from the application layer. The transfer mechanism of the MTSAT dissemination service is based on the transfer of data units which are called LRIT files. These files are the output of the presentation layer and their structure is explained in the following.

### 4.1 Structure of LRIT Files

Each application data unit will be formatted to an LRIT file or several LRIT files. An LRIT file consists of one or more header records and one data field.

The primary header record is mandatory and defines the file type and the size of the complete LRIT file. Depending on the file type, one or more secondary headers may be required to provide ancillary file information (see section 4.4).

|                   |                                                              |                                                                |            |
|-------------------|--------------------------------------------------------------|----------------------------------------------------------------|------------|
|                   |                                                              |                                                                |            |
| primary header #0 | secondary header record (#1-#127)<br>as defined in sect. 4.4 | secondary header record (#128-#255)<br>as defined in sect. 4.4 | data field |

**Figure 4-1      LRIT File Structure**

### 4.2 Segmentation of LRIT Files

In order to allow for a management of the LRIT channel occupation and flexibility concerning the usage of compression schemes, the full Earth's disk image data will be divided into a number of separate LRIT files. These files will be called *image segment files* from now on.

No segmentation of the other data (e.g. meteorological data) will be made.


### 4.2.1 Segmentation of Image Data

The full Earth's disk of MTSAT images will have a size of 2200 lines X 2200 pixels.

With an image segmentation size of 220 lines, one complete Earth image will consist of 10 image segment files (220 lines of 2200 columns).

The number of image segment files might be changed in future due to the timeliness requirement.

Figures 4-2 presents the above concept.

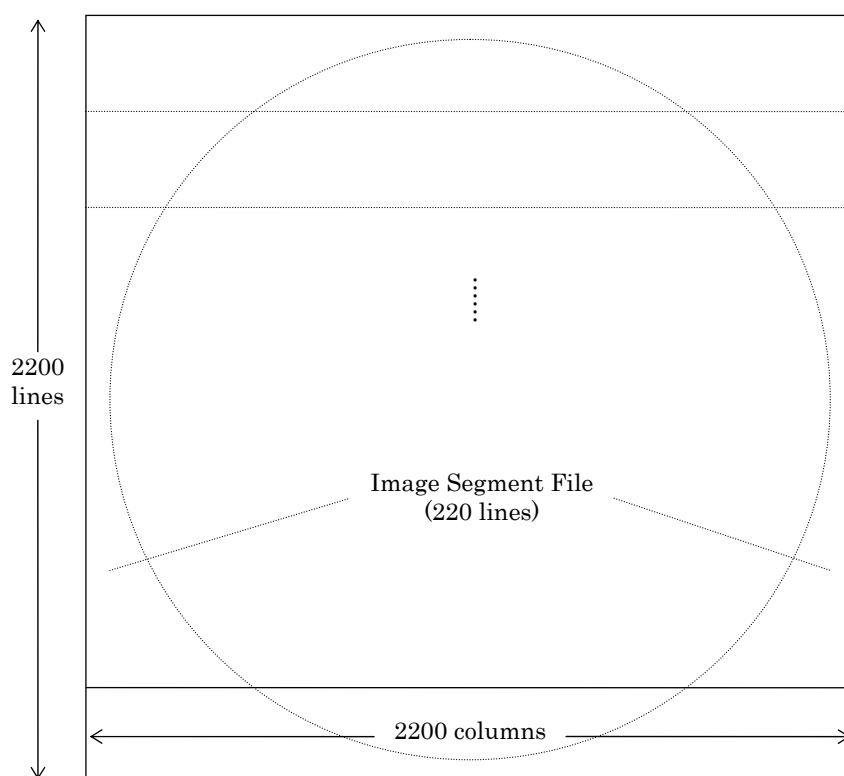

**Figure 4-2 MTSAT LRIT image data file structure of full Earth's disk**

The line direction will be from North to South and the column direction will be from West to East. The numbering of the image segment files will follow the line direction, i.e. the northernmost segment will be #1.

### 4.3 Overview of LRIT File Types

The ‘global’ file types (0... 127) have already been defined in [AD.1]. In addition, the mission specific file types (128...255) are available for future expansion.

Table 4-1 specifies all application data types identified and described in section 3 over the various LRIT file types.

| File type code                  | File type              | Application data type contained in the data field                                                            |
|---------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------|
| Global LRIT file types          |                        |                                                                                                              |
| 0                               | image data             | image data<br>- full Earth's disk of normalized geostationary projection<br>- polar-stereographic projection |
| 1                               | GTS message            | (not used in the MTSAT LRIT mission)                                                                         |
| 2                               | alpha-numeric text     | regular operational messages<br>- administrative messages                                                    |
| 3                               | encryption key message | support of MTSAT encryption scheme                                                                           |
| 4 ... 127                       | reserved               | (for further global use)                                                                                     |
| Mission specific LRIT file type |                        |                                                                                                              |
| 128 ... 255                     | reserved               | (for further mission specific use)                                                                           |

**Table 4-1            LRIT File Types**

## 4.4 LRIT File Header Types

### 4.4.1 General

The dissemination service will use the header types #0 - #7 of the LRIT/HRIT Global Specification as defined in [AD.1] and the mission specific headers #128 - #129 (see Table 4-2).

| Code                                                 | Header record type                | Structure                                           |
|------------------------------------------------------|-----------------------------------|-----------------------------------------------------|
| Headers as defined in LRIT/HRIT Global Specification |                                   |                                                     |
| 0                                                    | primary header                    | according to [AD.1], LRIT/HRIT global specification |
| 1                                                    | image structure                   |                                                     |
| 2                                                    | image navigation                  |                                                     |
| 3                                                    | image data function               |                                                     |
| 4                                                    | annotation                        |                                                     |
| 5                                                    | time stamp                        |                                                     |
| 6                                                    | ancillary text                    |                                                     |
| 7                                                    | key header                        |                                                     |
| 8 ... 127                                            | reserved for further global usage |                                                     |
| Mission Specific Headers                             |                                   |                                                     |
| 128                                                  | image segment definition          | image segment file information                      |
| 129                                                  | encryption key message header     | encryption key message information                  |
| 130 ... 255                                          | reserved                          | (for further mission specific use)                  |

**Table 4-2            Adaptation of LRIT Header Types**

## 4.4.2 Definition of Header Types

### 4.4.2.1 Header Type #0 - Primary Header

The structure of the primary header record is:

| Primary Header Record |     |                            |                                                                                                                                             |
|-----------------------|-----|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Header_Type           | ::= | unsigned integer (1byte)   | fixed value, set to 0                                                                                                                       |
| Header_Record_Length  | ::= | unsigned integer (2bytes)  | fixed value, set to 16                                                                                                                      |
| File_Type_Code        | ::= | unsigned integer (1byte)   | defines file type                                                                                                                           |
|                       |     | 0 : image data file        |                                                                                                                                             |
|                       |     | 1 : GTS Message            |                                                                                                                                             |
|                       |     | 2 : alphanumeric text file |                                                                                                                                             |
|                       |     | 3 : encryption key message |                                                                                                                                             |
| Total_Header_Length   | ::= | unsigned integer (4bytes)  | variable<br>specifies total size of all header records.                                                                                     |
| Data_Field_Length     | ::= | unsigned integer (8bytes)  | variable<br>specifies total size of the LRIT file data field in bits, this parameter will be completed after compression of the data field. |

**Table 4-3          Primary Header**

#### Explanations:

- File\_Type\_Code

The File\_Type\_Code specifies the format of the data to be transmitted via LRIT files. The relationship between application data types and File\_Type\_Code is as defined in Table 4-1.

#### 4.4.2.2 Header Type #1 - Image Structure

The structure of the image structure record is:

| Image Structure Record |     |                           |                          |
|------------------------|-----|---------------------------|--------------------------|
| Header_Type            | ::= | unsigned integer (1byte)  | fixed value, set to 1    |
| Header_Record_Length   | ::= | unsigned integer (2bytes) | fixed value, set to 9    |
| NB                     |     | unsigned integer (1byte)  | number of bits per pixel |
| NC                     |     | unsigned integer (2bytes) | number of columns        |
| NL                     |     | unsigned integer (2bytes) | number of lines          |
| Compression_Flag       | ::= | unsigned integer (1byte)  | compression method       |
|                        |     | 0 : no compression        |                          |
|                        |     | 1 : lossless compression  |                          |
|                        |     | 2 : lossy compression     |                          |

**Table 4-4          Image Structure**

#### Explanations:

- NB (number of bits per pixel)  
The value of NB will be : 8 for image data  
1 for overlay data.
- NC (number of columns)  
The value of NC will be : 2200 for the full Earth's disk image data  
800 for the polar-stereographic projection image data.
- NL (number of lines)  
The value of NL will be: 220 for the full Earth's disk image data due to the image segmentation  
800 for the polar-stereographic projection image data.
- Compression\_Flag  
The Compression\_Flag defines the compression method.

### 4.4.2.3 Header Type #2 - Image Navigation

The structure of the image navigation record is:

| Image Navigation Record |     |                                |                                            |
|-------------------------|-----|--------------------------------|--------------------------------------------|
| Header_Type             | ::= | unsigned integer (1byte)       | fixed value, set to 2                      |
| Header_Record_Length    | ::= | unsigned integer (2bytes)      | fixed value, set to 51                     |
| Projection_Name         | ::= | character (32bytes)            | projection names as defined in [AD.1]      |
|                         |     | "GEOS(<sub_lon>)" ,            |                                            |
|                         |     | "POLAR(<prj_dir>,<prj_lon>)" , |                                            |
|                         |     | "MERCATOR"                     |                                            |
| CFAC                    | ::= | integer (4bytes)               | column scaling factor as defined in [AD.1] |
| LFAC                    | ::= | integer (4bytes)               | line scaling factor as defined in [AD.1]   |
| COFF                    | ::= | integer (4bytes)               | column offset as defined in [AD.1]         |
| LOFF                    | ::= | integer (4bytes)               | line offset as defined in [AD.1]           |

**Table 4-5 Image Navigation**

#### Explanations:

- Projection Name

The Projection Names will be :

"GEOS(140.0)" for the full Earth's disk image.

"POLAR(N,135.0)" for the polar-stereographic image.

*note: 'N' denotes north polar stereographic projection*

All unused characters will be set to ASCII 'space' (20h).

- CFAC / LFAC

CFAC and LFAC are column and line scaling factors.

- COFF / LOFF

COFF and LOFF are projection specific offsets about image data (as defined in section 3). Image data will be divided into a number of separate LRIT files, so you have to confirm the Image Segment Identification Header(section 4.4.2.9 Header Type #128) for define the position of an image segment file window within the projection area.

For a further description of the navigation functions the reader shall refer to [AD.1].

#### 4.4.2.4 Header Type #3 - Image Data Function

This record determines the physical meaning of the image data, i.e. the relation between physical value and pixel count of the image data.

The structure of the image data function record is:

| Image Data Function record |     |                           |                                                                          |
|----------------------------|-----|---------------------------|--------------------------------------------------------------------------|
| Header_Type                | ::= | unsigned integer (1byte)  | fixed value, set to 3                                                    |
| Header_Record_Length       | ::= | unsigned integer (2bytes) | variable value                                                           |
| Data_Definition_Block      | ::= | character [ ]             | variable size and contents<br>in accordance with<br>[AD.1 section 4.3.2] |

**Table 4-6      Image Data Function**

#### Explanations

- Data\_Definition\_Block

This character string allows defining data structures of images and overlays, or look-up table.

##### Image Data

The relation between count and physical value is defined.

For infrared image data physical value corresponding to minimum count, i.e. 0, and that to maximum count, i.e. 255, are defined in principle. Linear interpolation is applied for bridging definition gaps of count to physical value.

e.g.      \$HALFTONE:=8<CR> \_NAME:=INFRARED <CR>  
            \_UNIT:=KELVIN<CR>0:=190.00<CR>255:= 310.00<CR>... etc.

For visible image data one pixel count may be set to any decimal integer between 0 and 63. Every physical value corresponding to count from 0 to 63 and 255 is defined.

e.g.      \$HALFTONE:=8<CR> \_NAME:=VISIBLE <CR>  
            \_UNIT:=PERCENT<CR>0:=0.000<CR>...63=100.0<CR>255:= 100.0<CR>... etc.

##### Overlay files:

All overlay files are disseminated as single bit-plane. Zero represents the overlay to be off. One represents overlay condition

e.g.      \$OVERLAY:=1<CR>

#### 4.4.2.5 Header Type #4 - Annotation

The annotation record will be used to identify more precisely the product/data type included in the data field of the LRIT file. It is assembled to allow for quick and easy detection of the most relevant file contents.

It can be assumed that all operating system in use at the user station sites will support long file names. Therefore, it is proposed to use the annotation text as a default distinctive file name.

The structure of the annotation record is:

| Annotation Record    |     |                           |                         |
|----------------------|-----|---------------------------|-------------------------|
| Header_Type          | ::= | unsigned integer (1byte)  | fixed value, set to 4   |
| Header_Record_Length | ::= | unsigned integer (2bytes) | variable value, max. 67 |
| Annotation_Text      | ::= | character [ ]             | used as file name       |

**Table 4-7          Annotation**

#### Explanations

- Annotation\_Text

The Annotation\_Text contains file name of data/products.

List of file name of image data can be found in the Appendix A.

#### 4.4.2.6 Header Type #5 - Time Stamp

The time stamp record will be written after the end of the session layer processing, i.e. after compression and encryption processing.

The structure of the time stamp record is:

| Time Stamp Record    |     |                           |                                        |
|----------------------|-----|---------------------------|----------------------------------------|
| Header_Type          | ::= | unsigned integer (1byte)  | fixed value, set to 5                  |
| Header_Record_Length | ::= | unsigned integer (2bytes) | fixed value, set to 10                 |
| CDS_P_Field          | ::= | unsigned integer (1byte)  | P-Field fixed value according to CCSDS |
|                      |     | bit 0 (MSB) = '0'         |                                        |
|                      |     | bits 1-3 = '100'          |                                        |
|                      |     | bits 4-7 = '0000'         |                                        |
| CDS_T_Field          | ::= | unsigned integer (6bytes) | 6 octets T-field according to CCSDS    |

**Table 4-8 Time Stamp**

#### Explanations

- CDS\_T\_Field

As defined by the CDS\_P\_Field, the 6 octets CDS\_T\_Field consists of  
 2 bytes counter of days starting from 1 January 1958  
 4 bytes milliseconds of day

CCSDS time code format is specified in [RD.4].

#### 4.4.2.7 Header Type #6 Ancillary Text

The structure of the ancillary text record is:

| Ancillary Text Record |     |                           |                            |
|-----------------------|-----|---------------------------|----------------------------|
| Header_Type           | ::= | unsigned integer (1byte)  | fixed value, set to 6      |
| Header_Record_Length  | ::= | unsigned integer (2bytes) | variable value, max. 65532 |
| Ancillary_Text        | ::= | character [ ]             | text                       |

**Table 4-9 Ancillary Text**

#### Explanations

- Ancillary\_Text

The Ancillary\_Text will contain descriptive text.

#### 4.4.2.8 Header Type #7 - Key Header

The structure of the key header record is:

| Key Header Record    |     |                           |                       |
|----------------------|-----|---------------------------|-----------------------|
| Header_Type          | ::= | unsigned integer (1byte)  | fixed value, set to 7 |
| Header_Record_Length | ::= | unsigned integer (2bytes) | fixed value, set to 7 |
| Key_Number           | ::= | unsigned integer (4bytes) | index of the used MGK |

**Table 4-10      Key Header**

#### Explanations

- Key\_Number

The 4 bytes Key\_Nmber consists of

|         |                                                               |
|---------|---------------------------------------------------------------|
| 2 bytes | key group identifier                                          |
| 1 bytes | corresponding to the file type code as defined in section 4.3 |
| 1 bytes | key identifier                                                |

The keys are divided into two groups as follows:

|                                |               |
|--------------------------------|---------------|
| key group identifier = '0000'h | : Key group 1 |
| key group identifier = '0001'h | : Key group 2 |

The reason for identifying two key groups is that the MTSAT encryption scheme will make use of a system whereby the actively used key group will be swapped from one to the other in regular intervals.

#### 4.4.2.9 Header Type #128 - Image Segment Identification

The structure of the image segment identification record is:

| Image Segment Identification Record |     |                           |                                  |
|-------------------------------------|-----|---------------------------|----------------------------------|
| Header_Type                         | ::= | unsigned integer (1byte)  | fixed value, set to 128          |
| Header_Record_Length                | ::= | unsigned integer (2bytes) | fixed value, set to 7            |
| Image_Segm_Seq_No                   | ::= | unsigned integer (1byte)  | image segment sequence number    |
| Total_No_Image_Segm                 | ::= | unsigned integer (1byte)  | total number of image segments   |
| Line_No_Image_Segm                  | ::= | unsigned integer (2bytes) | line number of the image segment |

**Table 4-11 Image Segment Identification**

#### Explanations

- Image-Segm-Seq-No

Image segmentation is applied to the following data to be disseminated as file type #0

Full Earth's disk image

No image segmentation is applied to the following data:

Polar-stereographic projection image  
Overlays (coastlines, etc.)

If no segmentation is applied, Image\_Segm\_Seq\_No will be set to 0.

- Total\_No\_Image\_Segm

Total number of image segment will be set to 10 for the full Earth's disk image data.

If no segmentation is applied, Total\_No\_Image\_Segm will be set 1.

- Line\_No\_Image\_Segm

The line number relative to COFF/LOFF (Header Type #2) of the first line for the each image segment will be set.

#### 4.4.2.10 Header Type #129 - Encryption Key Message Header

The structure of the encryption key message record is:

| Encryption Key Message Header Record |     |                           |                           |
|--------------------------------------|-----|---------------------------|---------------------------|
| Header_Type                          | ::= | unsigned integer (1byte)  | fixed value, set to 129   |
| Header_Record_Length                 | ::= | unsigned integer (2bytes) | fixed value, set to 5     |
| Station_Number                       | ::= | unsigned integer (2bytes) | index of the user station |

**Table 4-12      Encryption Key Message Header**

##### Explanations

- Station\_Number

The Station\_Number is used to identify an authorized user station.

### 4.4.3 File Type vs. Header Implementation

The global mandatory/optional use is specified in [AD.1]. Table 4-13 defines the JMA LRIT mission specific use of header record types within certain LRIT file types. 'JMA mandatory use' means that the identified header record will always be used in the JMA LRIT dissemination. 'JMA optional use' means that only creation LRIT files contain such header record.

| file types                 | header record types |   |   |   |   |   |   |   |     |     |
|----------------------------|---------------------|---|---|---|---|---|---|---|-----|-----|
|                            | 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 128 | 129 |
| 0: image data file         | ●                   | ● | ◎ | ◎ | ◎ | ◎ |   | ○ | ◎   |     |
| 1: GTS message             |                     |   |   |   |   |   |   |   |     |     |
| 2: alpha-numeric text file | ●                   |   |   |   |   | ◎ |   | ○ |     |     |
| 3: encryption key message  | ●                   |   |   |   |   | ◎ |   |   |     | ◎   |

Remarks:

● as requested by [AD.1]

◎ JMA mandatory use

○ JMA optional use

|     |                               |
|-----|-------------------------------|
| 0   | primary header                |
| 1   | image structure               |
| 2   | image navigation              |
| 3   | image data function           |
| 4   | annotation                    |
| 5   | time stamp                    |
| 6   | ancillary text                |
| 7   | key header                    |
| 128 | image segment identification  |
| 129 | Encryption Key message header |

**Table 4-13 Use of Header Records vs. File Type**

## **4.5 Detailed File Type Description**

### **4.5.1 File Type #0 - Image Data**

File type #0 will be used for image data and overlay data (latitude/longitude lines and coast lines).

The file type #0 may contain compressed and/or encrypted data. Such data will be flagged in the relevant secondary headers. Further detailed information about the algorithm of compression can be found in section 5.

The MTSAT LRIT service applies no encryption to the file type #0.

A detailed data format can be found in the Appendix A.

#### **4.5.1.1 Image Data**

This type of data corresponds to the geo-located and radiometrically pre-processed image data. The corresponding projection and coverage information is defined by the image navigation header. The physical meaning of the image data is defined by the image data function header.

#### **4.5.1.2 Overlay Data**

The overlay data including latitude/longitude lines and coast lines will consist of single bit plane. The overlay information is handled in the same manner as image data. The corresponding projection and coverage information is defined by the image navigation header.

### **4.5.2 File Type #1 - GTS message**

The file type 'GTS Message' will contain data coded in conformance to [RD.3].

The MTSAT LRIT service does not use the file type #1

#### **4.5.3 File Type #2 - Alpha-numeric Text**

This file type will mainly be used for the regular distribution of text-oriented service messages (e.g. administrative messages, etc.).

Each message will have to contain a unique sequence number which allows the user to discard messages which have already been received previously.

#### **4.5.4 File Type #3 - Encryption Key Message**

The Encryption Key Message will contain a complete set of encrypted message keys of all key number.

A detailed data format can be found in section 5.4.5.

## **5. SESSION LAYER**

### **5.1 General**

The session layer provides the means for interchange of data. In the MTSAT LRIT, this layer includes the definition of data compression and encryption.

### **5.2 Input to Session Layer**

The LRIT files as shown in Figure 4-1 are the input to the Session Layer processing.

### **5.3 Compression**

#### **5.3.1 General**

Compression is required to maximize the data available in the LRIT channel.

The ISO standard 10918 'Digital compression and coding of continuous-tone still images' [RD.5] known as JPEG is chosen as the compression baseline for the MTSAT LRIT service. It supports lossy and lossless schemes.


The selection of the compression type and compression factor for the MTSAT LRIT service will be based on a schedule and will allow for adjustment of the LRIT channel occupation. The selected compression type and compression factor will be kept stable on single LRIT file.

Compressed LRIT files will be self-describing, i.e. the JPEG interchange format includes all required tables and other relevant information for the decoding process. The quantization and coding tables will be kept stable on single LRIT file.

Data compression will operate on single LRIT file. The compression flag (CFLG) of the image structure record (header type #1) is set to 1 or 2.

Compression will only be applied to file type #0 (image data).  
No compression to LRIT file types other than file type #0 (image data) is applied.

Compression will operate on the LRIT file data field only and will leave all header data unmodified. After compression, the LRIT file will contain a compressed data field as depicted in Figure 5-1.



**Figure 5-1** LRIT File Structure with compressed data field


### 5.3.2 Introduction to Lossy JPEG Compression

The JPEG lossy compression scheme supports 8-bit or 12-bit pixel resolution. Inputs to the lossy JPEG coder are data arrays sized 8x8 pixel. In a first step, a discrete cosine transform (DCT) turns each data array of intensity data into an array of frequency data. Each of the frequency data values from the DCT is quantized in conjunction with a quantization table. The two-dimensional quantized DCT coefficients are then converted to a serial bit stream according to a zig-zag sequence and the results are entropy coded (compressed).

The following lossy DCT-based modes of compression exist:

- baseline process (only 8-bit, only Huffman coding, only sequential scan)
- extended process (8-bit or 12-bit, Huffman or arithmetic coding, sequential and progressive scans)
- hierarchical process

Figure 5-2 shows the principle of lossy compression. For further information on the lossy compression algorithm, refer to [RD.5].

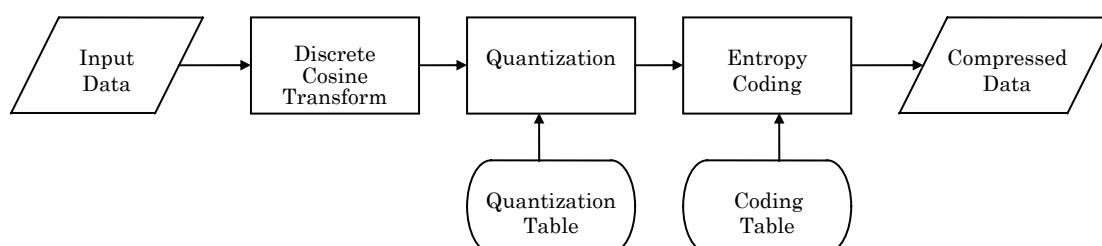

**Figure 5-2** Lossy JPEG Compression Scheme

### 5.3.3 Introduction to Lossless JPEG Compression


This section provides a short introduction to the JPEG lossless compression.

The lossless JPEG scheme is based on a prediction of the pixel value. The lossless JPEG coder supports input precision of 2... 16 bits per sample. A set of predictors is defined. The pixel value is coded as a difference of the pixel value to that prediction. No blocking structure of the image data and no DCT-based encoding are used in the lossless compression mode.

Two lossless modes of compression are possible:

- lossless process with Huffman coding
- lossless process with arithmetic coding

Figure 5-3 shows the principle of lossless compression. For further information on the lossless compression algorithm, refer to [RD.5].

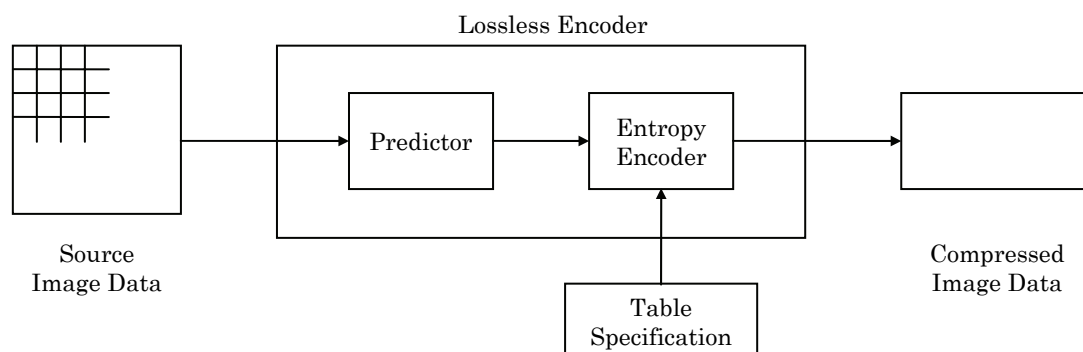

**Figure 5-3**      **JPEG Lossless Image Compression Scheme**

#### **5.3.4 MTSAT Mission specific JPEG Implementation**

This section defines the mission specific JPEG implementation. This includes the definition of the overall structure, the used compression processes, the coding applied and the detailed marker segments.

### 5.3.4.1 Mission specific JPEG Structure and supported Modes

The JPEG compression encoding process will transform the data field of an LRIT image file into one JPEG image in accordance with the data format definitions given in [RD.5]. Figure 5-4 shows the JPEG compressed image data structure closely following these definitions and the used terminology. The figure already includes certain assumptions about the JPEG modes used for the MTSAT LRIT concept.

The MTSAT LRIT will only make use of the following JPEG modes:

- sequential mode (as opposed to progressive - no multi-scans)
- non-interleaved mode (single spectrum, no multi-components)
- non-hierarchical mode (non-differential coding - no multi-frames)


Consequently, one JPEG image contains one frame with only one scan embedded between start of image (SOI) and end of image (EOI) markers. A JPEG scan will contain an entropy coded segment (ECS) of one component.

An ECS contains minimum coded units (MCU). In the case of DCT-based (lossy) processes an MCU originates from an 8x8 pixel array. For lossless processes, an ECS consists of at least a pixel row.

Huffman entropy coding will form the baseline for the MTSAT LRIT service.

No arithmetic coding will be used for the MTSAT LRIT service.

The output of the JPEG process creates a byte aligned output as described in [RD.5]

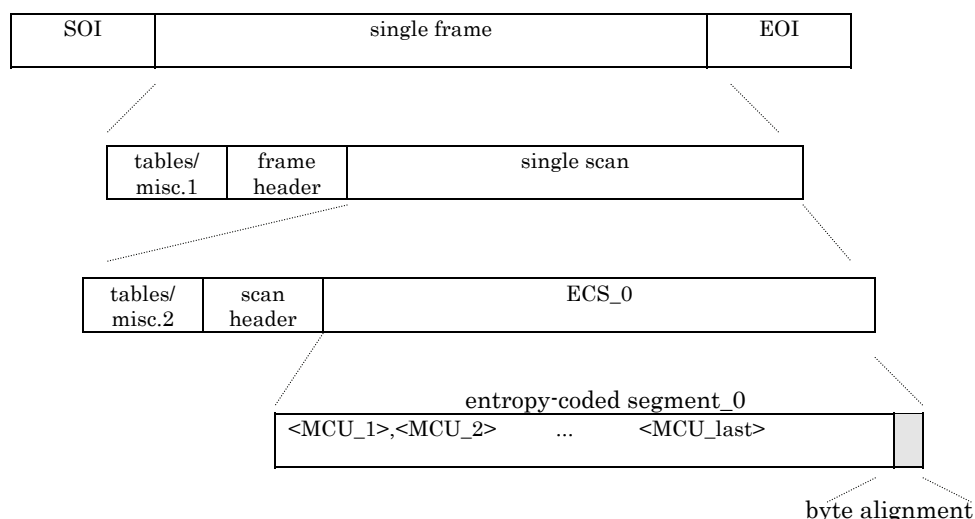

**Figure 5-4 JPEG structure of compressed image data**

SOI Start of Image Marker  
 EOI End of Image Marker  
 ECS Entropy coded segment  
 MCU Minimum coded unit

### 5.3.4.2 JPEG Frame Header Structure

The JPEG frame header directly follows the ‘tables/misc.1’ field. It specifies the applied JPEG encoding process via its ‘Start of Frame’ marker (SOF) and provides information about size and component structure. Figure 5-5 and Table 5-1 provide all details of the MTSAT mission specific JPEG implementation.

The following restrictions apply:

- only a sub-set of all possible SOF will be used
- only parameters of a signal component will be contained

The structure of a JPEG Frame Header is:

|                                         |    |   |   |   |    |                |                |                |                 |
|-----------------------------------------|----|---|---|---|----|----------------|----------------|----------------|-----------------|
| SOF                                     | Lf | P | Y | X | Nf | C <sub>1</sub> | H <sub>1</sub> | V <sub>1</sub> | Tq <sub>1</sub> |
| ..... single component parameters ..... |    |   |   |   |    |                |                |                |                 |

**Figure 5-5 SOF structure**

| Frame Header   |     |                                       |                                                                                              |
|----------------|-----|---------------------------------------|----------------------------------------------------------------------------------------------|
| SOFn           | ::= | unsigned integer (2bytes)             | start of frame marker                                                                        |
|                |     | ‘FFC0’h : baseline DCT                | SOF0 (Huffman coding)                                                                        |
|                |     | ‘FFC1’h : extended sequential DCT     | SOF1 (Huffman coding)                                                                        |
|                |     | ‘FFC3’h : spatial sequential lossless | SOF3 (Huffman coding)                                                                        |
| Lf             | ::= | unsigned integer (2bytes)             | frame header length, fixed value, set to 11                                                  |
| P              | ::= | unsigned integer (1byte)              | sample precision                                                                             |
| Y              | ::= | unsigned integer (2bytes)             | number of lines                                                                              |
| X              | ::= | unsigned integer (2bytes)             | number of samples per line                                                                   |
| Nf             | ::= | unsigned integer (1byte)              | number of image components,<br>fixed value, set to 1<br>(only single component is supported) |
| C <sub>1</sub> | ::= | unsigned integer (1byte)              | component identifier                                                                         |
| H <sub>1</sub> | ::= | binary (4bits)                        | horizontal sampling factor,<br>fixed value, set to 1                                         |
| V <sub>1</sub> | ::= | binary (4bits)                        | vertical sampling factor,<br>fixed value, set to 1                                           |

**Table 5-1 Frame Header Structure**


### 5.3.4.3 JPEG Scan Header Structure

The JPEG scan header directly follows the ‘tables/misc.2’ field. It specifies further component specific parameters, selects entropy coding tables and their start values. Figure 5-6 and Table 5-2 provide all details of the MTSAT mission specific JPEG implementation.

The following restrictions apply:

- only a SOF sub-set will be used
- only parameters of a single component will be contained

The scan header will have the following structure:



**Figure 5-6 SOS structure**

| Scan Header |     |                           |                                                                                                                                                                                                      |
|-------------|-----|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOS         | ::= | unsigned integer (2bytes) | start of scan marker, set to ‘FFDA’h                                                                                                                                                                 |
| Ls          | ::= | unsigned integer (2bytes) | frame header length, fixed value, set to 9                                                                                                                                                           |
| Ns          | ::= | unsigned integer (1byte)  | number of image components,<br>fixed value, set to 1                                                                                                                                                 |
| Cs1         | ::= | unsigned integer (1byte)  | scan component selector,<br>fixed value, set to 0                                                                                                                                                    |
| Td1         | ::= | binary (4bits)            | DC entropy coding table selector, fixed to 0                                                                                                                                                         |
| Ta1         | ::= | binary (4bits)            | AC entropy coding table selector, fixed to 0                                                                                                                                                         |
| Ss          | ::= | unsigned integer (1byte)  | table 0 for lossy compression,<br>N/A (0) for lossless compression<br>start of spectral or predictor selection<br>0 for lossy processes,<br>1-7 according to predictor table (see<br>[RD.5 annex H]) |
| Se          | ::= | unsigned integer (1byte)  | end of spectral selection<br>63 for lossy processes,<br>0 for lossless processes                                                                                                                     |
| Ah          | ::= | binary (4bits)            | successive approximation bit position<br>high, fixed value, set to 0                                                                                                                                 |

**Table 5-2 Scan Header Structure**

5.3.4.4 Structure of Table and Miscellaneous Marker Segments

The MTSAT mission specific JPEG implementation will use the following tables and miscellaneous marker segments:

- define quantization table(s) (DQT)
  - define Huffman table(s) (DHT)
- Define Quantization Table Marker (for lossy JPEG compression only)

In the case of DCT-based encoding processes (lossy compression), the ‘Define Quantization Table’ Marker will be contained in the ‘tables/misc.1’ field(s) preceding the ‘Start of Frame’ Marker. Its syntax will follow the specification given in [RD.5].

Only one quantization table will be contained in one JPEG image.

The structure of the quantization table marker (DQT) is:

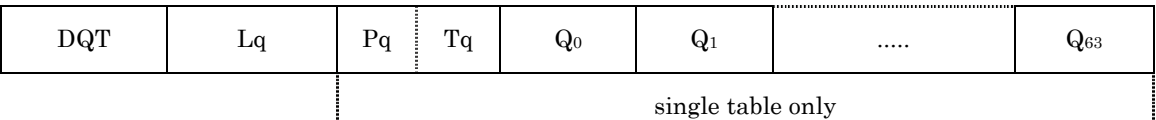


Figure 5-7 Quantization table structure

| Quantization table structure |     |                                     |                                             |
|------------------------------|-----|-------------------------------------|---------------------------------------------|
| DQT                          | ::= | unsigned integer (2bytes)           | fixed value, set to 'FFDB'h                 |
| Lq                           | ::= | unsigned integer (2bytes)           | quantization table length, set to 67 or 131 |
| Pq                           | ::= | binary (4bits)                      | quantization table element precision        |
|                              |     | 0 : baseline DCT                    |                                             |
|                              |     | 1 : extended DCT                    |                                             |
| Tq                           | ::= | binary (4bits)                      | quantization table identifier               |
|                              |     | 0 : table 0                         | Only one table will be used at a time       |
|                              |     | 1 : table 1                         | the default value will be 0                 |
|                              |     | 2 : table 2                         |                                             |
|                              |     | 3 : table 3                         |                                             |
| Qk                           | ::= | unsigned integer[64] (1byte/2bytes) | quantization table elements                 |
|                              |     | unsigned integer (1byte), if Pq=0   | value range for baseline DCT (1 .. 255)     |
|                              |     | unsigned integer (2bytes), if Pq=1  | value range for extended DCT (1 .. 65535)   |

Table 5-3 DQT Marker

Define Huffman Table Marker

The ‘Define Huffman Table’ Marker syntax will follow the specification given in [RD.5]. This marker will be contained in the ‘Tables/Misc.2’ field directly following the ‘SOF’ marker. Not more than two ‘DHT’ markers (one DC table 0 and one AC table 0) will be contained per JPEG image.

The structure of one ‘Define Huffman Table’ marker (DHT) is:




Figure 5-8 Huffman table structure

| Huffman table structure |     |                                                                            |                                                                                                  |
|-------------------------|-----|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| DHT                     | ::= | unsigned integer (2bytes)                                                  | fixed value, set to 'FFC4'h                                                                      |
| Lh                      | ::= | unsigned integer (2bytes)                                                  | Huffman table definition length,<br>variable value                                               |
| Tc                      | ::= | binary (4bits)<br>0 : DC table<br>1 : AC table                             | table class                                                                                      |
| Th                      | ::= | binary (4bits)<br>0 : table 0<br>1 : table 1<br>2 : table 2<br>3 : table 3 | Huffman table identifier<br>Only one table will be used at a time<br>the default value will be 0 |
| Li                      | ::= | unsigned integer[16] (1byte)                                               | number of Huffman codes of length i                                                              |
| HUFFVAL_list            |     | unsigned integer[MT] (1byte)                                               | list of values associated with each Huffman<br>code of length i according to the Huffman         |

Table 5-4 DHT Marker

Definition of MT:

$$MT = \sum_{i=1}^{16} Li(t)$$

## 5.4 Encryption

The MTSAT LRIT service includes a mechanism to control the access to LRIT.


### 5.4.1 Encryption Principle

The encryption algorithm will only operate on the data fields of LRIT files and leave all header records unmodified. The encryption principle is based on the substitution and transposition for the clear data.

If encryption is applied to the LRIT data field, a key header (header type #7) as defined in section 4.4.2.8 will be part of the header records preceding the data field. The keys will be distributed separately via the file type #3 (encryption key message, see section 4.5.4).

The encryption and decryption are based on a processing in accordance with the Electronic Code Book (ECB) mode of Data Encryption Standard (DES). This mode avoids error propagation in an error prone communication system. The DES process is described in [RD.6]. The ECB is defined in [RD.7].

Figure 5-9 shows the principle of encryption and decryption.

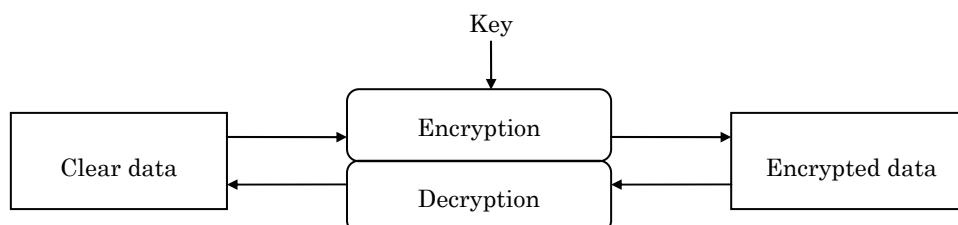

**Figure 5-9**      **Encryption Principle**

### **5.4.2 Key Definition**

The MTSAT encryption infrastructure requires two types of keys:

- User Station Keys (USK)
- Message Keys (MGK)

#### **User Station Keys - USK**

User Station Keys are secret elements which are fixed.

User Station Keys are used:

- at the Key Center for Message Key encryption with the relevant User Station Key
- at the user station for the Message Key recovery

The Key Center generates for each user station a specific USK. Each USK is dedicated to a user station.

#### **Message Keys - MGK**

Message Keys are secret elements generated by the Key Center and which are to be considered static. MGK sets are updated periodically. MGKs are transmitted to the user stations via dissemination in encrypted form. MGKs are used to encrypt/decrypt the LRIT data field.

### 5.4.3 Key Representation

The DES key consists of 64 bits, 56 of which are used as a decode/encode key (forming the active key) and 8 of which are parity bits to detect errors in the key.

The DES key numbering convention shown in Figure 5-10 conforms to [RD.6]. The 64 bits per a DES key are numbered from left to right. Bits (8, 16, 24,..., 64) are used for the parity checking of each 8-bit byte. The parity of the octet is odd.

|                |                                                           |
|----------------|-----------------------------------------------------------|
| <b>DES Key</b> | 56 bit key + 8 bit parity<br>K(1), K(2), K(3),... , K(64) |
|----------------|-----------------------------------------------------------|

notation of K(n) : n = DES Key bit number

In the case keys are distributed via communication means, K(1) equals by definition to the MSB (CCSDS Bit 0) and is transmitted first.

#### Figure 5-10 DES Key decomposition

All DES keys used in the MTSAT encryption scheme, namely the USKs and the MGKs will follow this convention and contain real parity bits.

#### 5.4.4 Key Function

The Key Center generates a specific User Station Key (USK) and a specific Station Number for each authorized user station. They are provided to the authorized users (NMSs/NHMSs) in written document. The function of USK is to avoid any unauthorized use of Message Keys (MGKs).

Message Keys (MGKs) are generated by the Key Center and used to encrypt/decrypt the LRIT files.

An LRIT file is encrypted with an MGK selected by the Key Center. The Encrypted LRIT file is accompanied by a Key Header (header type #7). The Key Header contains Key Number of MGK used in encryption process.

The encrypted LRIT file is decrypted with the MGK specified by the Key Number.


The Key Center assembles an Encryption Key Message (file type #3) which consists of some sets of Key Number and MGK. Each Encryption Key Message is generated for each authorized user station, is encrypted with each USK, and is periodically disseminated to the user stations.

The Encryption Key Message is accompanied by an Encryption Key Message Header (header type #129) which contains Station Number. MGKs can be retrieved from the Encryption Key Message with only the USK identified by the Station Number.

MGKs stored in the each user station are replaced with the latest MGKs retrieved from the Encryption Key Message.

MGKs are divided into two key groups: Key groups 1 and 2. In each LRIT file its Key Header designates which key group is used for encryption/decryption. A key group used for encryption/decryption is called the active key group and that not used is called the inactive key group. When MGKs are updated, the inactive key group is updated. The inactive key group is activated at a certain time.

The function diagram is shown in Figure 5-11.

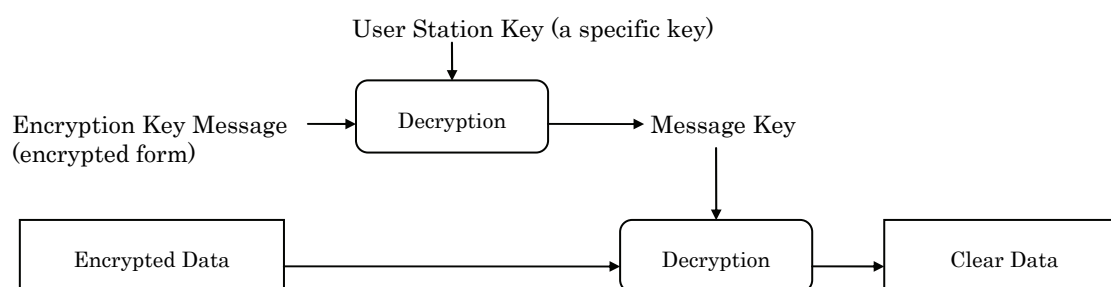

**Figure 5-11      Function Diagram**

The following procedures are applied at the user station:

(Pre-setting)

- 1) Input the USK and Station Number for the user station from the keyboard.

(Processing of Encryption Key Message)

- 2) The Encryption Key Message for the user station is selected using its Station Number.
- 3) The Encryption Key Message is decrypted using its USK and is stored in the data processing unit.

(Processing of LRIT data file)

- 4) The applicable MGK is determined from the Encryption Key Message in the data processing unit using the Key Number in the Key Header of the LRIT data file.
- 5) The LRIT data file is decrypted with the applicable MGK.

(Procedures from 2) to 5) are carried out automatically.)

#### 5.4.5 Encryption Key Message File

The Encryption Key Message will contain a complete set of message keys of all key number for an authorized user station.

The Encryption Key Message file will be encrypted entirely with the relevant USK and generated for every authorized user station.

The structure of the Encryption Key Message file is:

| set #1  |         | set #2  |         | ..... | set #n  |         |
|---------|---------|---------|---------|-------|---------|---------|
| key No. | MGK     | Key No. | MGK     |       | Key No. | MGK     |
| 4 bytes | 8 bytes | 4 bytes | 8 bytes |       | 4 bytes | 8 bytes |

**Figure 5-12      Encryption Key Message File**

5.5 Session Layer Output

Output of the session layer to the transport layer is the session protocol data unit (S\_PDU) containing the variable length compressed and encrypted data field as shown in Figure 5-13.

If neither compression nor encryption has been applied, the session layer will leave the data field unmodified.

In any case the session layer processing will have to determine the data field length and fill it into the primary header and to add the time stamp (if required) before it passes the complete data unit as S\_PDU to the transport layer.

The transport layer is called by the session layer with the following syntax:

TRANSPORT.request (S\_PDU, PRIO)




Figure 5-13      LRIT Session Protocol Data Unit (S\_PDU)

## 6. TRANSPORT LAYER

### 6.1 General

The transport layer receives the S\_PDUs as a transport service data unit (TP\_SDU) which is a variable length file as shown in Figure 5-13 and the parameters PRIO.

The determination of the application process identifier (APID) will be performed according to [AD.1].

The transport files are split into one or more blocks of 8190 bytes size which form the user data field of the source packet. The last block may be shorter and contain 1... 8190 bytes. Each user data field will be followed by a 2-octet Cyclic Redundancy Check (CRC).

### 6.2 Source Packetization

#### 6.2.1 Source Packet Structure

This section defines in detail the source packet structure:

| Source Packet Header (48 bits) |       |                       |         |                         |                       |               | Packet Data Field (variable) |                            |
|--------------------------------|-------|-----------------------|---------|-------------------------|-----------------------|---------------|------------------------------|----------------------------|
| Packet Identification          |       |                       |         | Packet Sequence Control |                       | Packet length | User Data Field              |                            |
| Version No                     | Type  | Secondary Header Flag | APID    | Sequence Flags          | Packet Sequence Count |               | Application Data Field       | Packet Error Control (CRC) |
| 3 bits                         | 1 bit | 1 bit                 | 11 bits | 2 bits                  | 14 bits               | 16 bits       | variable                     | 16 bits                    |
| 2 octets                       |       |                       |         | 2 octets                |                       | 2 octets      | max.8190 octets              | 2 octets                   |

**Figure 6-1 Source Packet Structure (TP\_PDU)**

**Version No** The version No. bits will be set to 000, identifying the Version-1 CCSDS packet.

**Type** Set to 0. Type is not used in CCSDS AOS.

**Secondary header flag** Set to 1 if the user data begins with a header field, set to 0 else.

**APID**

see Table 6-1

| Application Process Identifier (APID) | Application                           |
|---------------------------------------|---------------------------------------|
| 0 ... 2015                            | LRIT application data                 |
| 2016 - 2046                           | reserved by CCSDS (not used for LRIT) |
| 2047                                  | Fill Packets                          |

**Table 6-1 Application Process Identifiers****Sequence Flag**

as defined in [AD.1]

**Packet Sequence Count**

14-bit Packet Sequence Count, straight sequential count (modulo 16384) which number each source packet generated per APID.

**Packet Length**

16-bit binary count which expresses the length of the remainder of the source packet following this field minus 1.

**Application Data Field**

contains up to 8190 octets of user data, i.e. a block of the TP\_SDU

**Packet Error Control**

The 16 bit CRC forms the trailer of the user data field. It has to be derived as defined in [AD.1].

The CRC is computed over the entire application data field. The generator polynomial is

$$g(x) = x^{16} + x^{12} + x^5 + 1$$

The encoder shall be initialized to 'all ones' for each application data field.

**6.3 Transport Layer Output**

The transport layer output is the protocol data unit TP\_PDU which is identical to the source packet as depicted in Figure 6-1. This will be forwarded as service data unit to the Network Layer via

Packet.request (CP\_SDU, APID)

## **7. NETWORK LAYER**

### **7.1 Input to Network Layer**

The source packets as shown in Figure 6-1 are the CCSDS path service data units (CP\_SDU) forming the input to the Network Layer.

### **7.2 General**

The Network Layer represents the CCSDS AOS path layer. The only function in the LRIT service is the generation of a Virtual Channel Identifier (VC-ID). The data received from the transport layer is transparently routed to the Data Link Layer.

### **7.3 Network Layer Processing**

The VC-ID is generated as a value resulting from an integer division of APID by 32. APID will be set to 0 ... 2015. APID beyond 2015 must not be used with LRIT. Thus VC will be set to 0 ... 62. The used VC-IDs depend on APID assigned to the application data.

### **7.4 Output of Network Layer**

The Network Layer output is the

M\_UNITDATA.request (CP\_PDU, VCDU-ID).

The CCSDS path protocol data unit (CP\_PDU) is identical to the initial CP\_SDU just forwarded through the network layer.

## 8. DATA LINK LAYER

### 8.1 Input to Data Link Layer

The Network Layer provides the CP\_PDU as multiplexing service data units (M\_SDU) to the data link layer.

### 8.2 General

The Data Link Layer is implemented by the CCSDS AOS space link layer. It consists of two sub-layers:

- virtual channel link control (VCLC) sub-layer
- virtual channel access (VCA) sub-layer

As described in section 8.3 the VCLC sub-layer processing provides the multiplexing service only. This includes filling of M\_SDUs into multiplexing protocol data units (M\_PDU). Fill packets may have to be generated for the completion of the M\_PDUs after time-out expiration.

The VCA sub-layer generates the virtual channel data units (VCDU), performs Reed-Solomon coding, data randomization and attachment of synchronization markers, and will generate 'fill-VCDUs' as specified in section 8.4.2 to maintain continuous data delivery to the physical layer.

### 8.3 VCLC Sub-layer Processing

The VCLC sub-layer processing performs the multiplexing and the M\_PDU generation in accordance with [AD.1].

The M\_PDUs will consist of 886 octets of which 2 octets are the M\_PDU header and the 884 octets are the M\_PDU packet zone as shown in Figure 8-1.

| M_PDU header |                      | M_PDU packet zone      |             |                 |     |                          |
|--------------|----------------------|------------------------|-------------|-----------------|-----|--------------------------|
| spare        | first header pointer | end of M_SDU # $(k-1)$ | M_SDU # $k$ | M_SDU # $(k+1)$ | ... | beginning of M_SDU # $m$ |
| 5 bit        | 11 bit               |                        |             |                 |     |                          |
| 2 octets     |                      | 884 octets             |             |                 |     |                          |

**Figure 8-1 M\_PDU Structure**

The M\_PDUs are passed to the VCA sub-layer service as VCA\_UNITDATA.request (M\_PDU, VCDU-ID).

### 8.3.1 Fill Packet Generation

In case that a partly generated M\_PDU cannot be completed since no more M\_SDU is available for the related virtual channel, a fill packet is generated to complete the M\_PDU. The structure of this fill packet is shown as follows:

|                              |                    |
|------------------------------|--------------------|
| <b>Version</b>               | '000'              |
| <b>Type</b>                  | '0'                |
| <b>Secondary Header Flag</b> | '1'                |
| <b>APID</b>                  | 2047               |
| <b>Sequence Flag</b>         | '11' (unsegmented) |
| <b>Packet length</b>         | as required        |
| <b>User Data Field</b>       | 'all zeros'        |

## 8.4 VCA Sub-layer Processing

### 8.4.1 VCDU Assembly


The M\_PDUs from the VCLC layer are received as VCA\_SDUs from the VCLC sub-layer and are used to assemble virtual channel data units (VCDU) according to [AD.1].

‘VCDU generation the following constant ‘packetized data rate’ for the LRIT dissemination channels will be achieved.

LRIT 75Kbps (Max Through put data rate 64Kbps+FEC and Fraction adjustment)


*note: The ‘packetized data rate’ is defined as the data stream after formatting and packetization, and before FEC coding and transmission. More precisely, it is the data at the VCDU level excluding sync marker and R-S check symbols.*

The VCDU structure is shown in Figure 8-2.

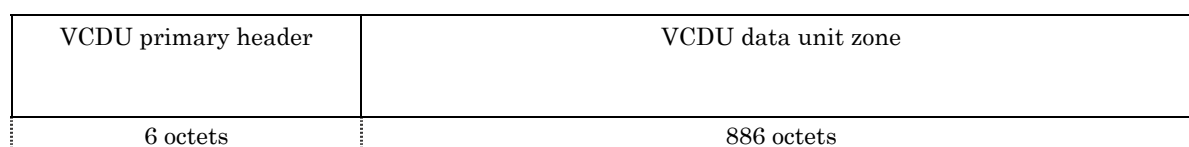

**Figure 8-2 VCDU structure**

The decomposition of the VCDU header is given in Figure 8-3.

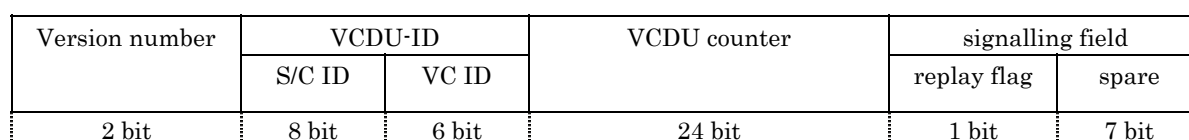

**Figure 8-3 VCDU Primary Header**

#### Mission specific use:

|                         |                                                                                                                   |
|-------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Version Number</b>   | ‘01’                                                                                                              |
| <b>VCDU-ID</b>          | The S/C ID represents the disseminating spacecraft.<br>MTSAT-1R: 11010101 (D5,HEX)<br>MTSAT-2 : 11111000 (F8,HEX) |
| <b>VCDU Counter</b>     | The VC ID is as specified in section 7.3.<br>as defined in [AD.1]                                                 |
| <b>Signalling Field</b> | ‘all zeros’                                                                                                       |

*note: The ‘ VCDU Counter’ will restart from ‘ zero or Overlap’ after configuration changes in the Dissemination Element.*

### 8.4.2 'Fill VCDU' Generation

The VCA sub-layer processing will automatically generate a 'fill-VCDU' in the case no or not sufficient VCDUs (underflow condition) to maintain a continuous data flow to the physical layer.

The definition of a 'fill-VCDU' is:

|                            |                                                                                            |
|----------------------------|--------------------------------------------------------------------------------------------|
| <b>Version</b>             | '01'                                                                                       |
| <b>VCDU-ID</b>             | S/C ID    depending on used S/C (see list in section 8.4.1)<br>VC ID    '63'h ('all ones') |
| <b>VCDU Counter</b>        | as defined in [AD.1]                                                                       |
| <b>Signalling Field</b>    | 'all zeros'                                                                                |
| <b>VCDU Data Unit Zone</b> | fill pattern 'all zeros'                                                                   |

*note:        The 'Fill VCDU Counter' will restart from 'zero or Overlap' after configuration changes in the Dissemination Element.*

### 8.4.3 Reed-Solomon Coding

The LRIT dissemination service is a Grade-2 service, therefore, the transmission of user data will be error controlled using Reed-Solomon coding as an outer code.

The used Reed-Solomon code is (223,255) with an interleaving of I=4 according to [RD.8]

The VCDUs will be attached by 128 octets of Reed-Solomon check symbols to form a coded VCDU (CVCDU).

| VCDU<br>Primary header | VCDU<br>data unit zone | Reed-Solomon<br>Check Symbols |
|------------------------|------------------------|-------------------------------|
| 6 octets               | 886 octets             | 128 octets                    |

**Figure 8-4 CVCDU Structure**

### 8.4.4 Randomization

Randomization is applied to all LRIT CVCDUs. It is a process which a pseudo-random sequence is bitwise exclusive-ORed to all 8160 bits of the CVCDU to ensure sufficient data transitions.

The pseudo-random sequence shall be generated using the following polynomial:

$$h(x) = x^8 + x^7 + x^5 + x^3 + 1$$

This sequence begins at the first bit of the CVCDU and repeats after 255 bits, continuing repeatedly until the end of the CVCDU. The sequence generator is then re-initialized to all-ones for the processing of the next CVCDU.

The first 40 bits of the pseudo-random sequence from the generator are shown below; the left-most bit is the first bit of the sequence to be exclusive-ORed with the first bit of the CVCDU; the second bit of the sequence is exclusive-ORed with the second bit of the CVCDU, and so on.

1111 1111 0100 1000 0000 1110 1100 0000 1001 1010 ...

#### **8.4.5 Sync Marker Attachment**

An attached synchronization marker (ASM) will have to precede the randomized CVCDU to allow for frame synchronization. The 32 bit pattern can be represented in hexadecimal notation as:

1ACFFC1D

The ASM and together with the CVCDU create the channel access data unit (CADU) of 1024 octets length.

#### **8.4.6 Serialization and Output of the Data Link Layer**

As a final task the VCA sub-layer performs the serialization of the CADU and provides the serial bit-stream to the physical layer.

## 9. PHYSICAL LAYER

The physical layer on the LRIT service performs the convolutional coding of the serialized data stream and its modulation onto the RF up-link signal.

The used convolutional coding in principle conforms to [RD.8] with the exception that no symbol inversion will be performed in the G2 path.

The complete parameter sets of the physical layer are specified in the Appendix C.

The RF carrier maintains a continuous modulation not to exceed the specified power flux density.

## APPEDIX A - DATA FORMAT OF IMAGE DATA

### A.1 Image Data

LRIT will provide image data produced from data observed with the MTSAT. The image data correspond to geo-located and radiometrically pre-processed image data. The image data files consist of one image of a particular spectral channel.

Two types of image data will be disseminated. One is full Earth's disk image of normalized geostationary projection; the other is image of polar-stereographic projection. The polar-stereographic projection has three different projection areas covering East Asia, the north-east of Japan and the south-west of Japan. The image data disseminated via LRIT are as listed in Table A.1.

| Projection Type                                                 | Spectral Channel |               |               |                |                |
|-----------------------------------------------------------------|------------------|---------------|---------------|----------------|----------------|
|                                                                 | VIS              | IR1<br>(11μm) | IR2<br>(12μm) | IR3<br>(6.7μm) | IR4<br>(3.7μm) |
| Full Earth's Disk of normalized geostationary projection        | ○                | ○             | -             | ○              | -              |
| Polar-stereographic projection covering East Asia               | ○                | ○             | -             | ○              | ○              |
| Polar-stereographic projection covering the north-east of Japan | ○                | -             | -             | -              | -              |
| Polar-stereographic projection covering the south-west of Japan | ○                | -             | -             | -              | -              |


**Table A-1**      **Image Data disseminated via LRIT**

### A.1.1 Full Earth's Disk Image of Normalized Geostationary Projection

The full Earth's disk image data file is divided into 10 separate files. These files are called image segment files. The complete full Earth's disk image has a size of 2200 lines X 2200 pixels. With an image segmentation size of 220 lines, one complete image will consist of 10 image segment files (220 lines of 2200 columns).

Number of image segment files might be changed in future due to timeliness requirement.

Figures A-1 presents the above concept.

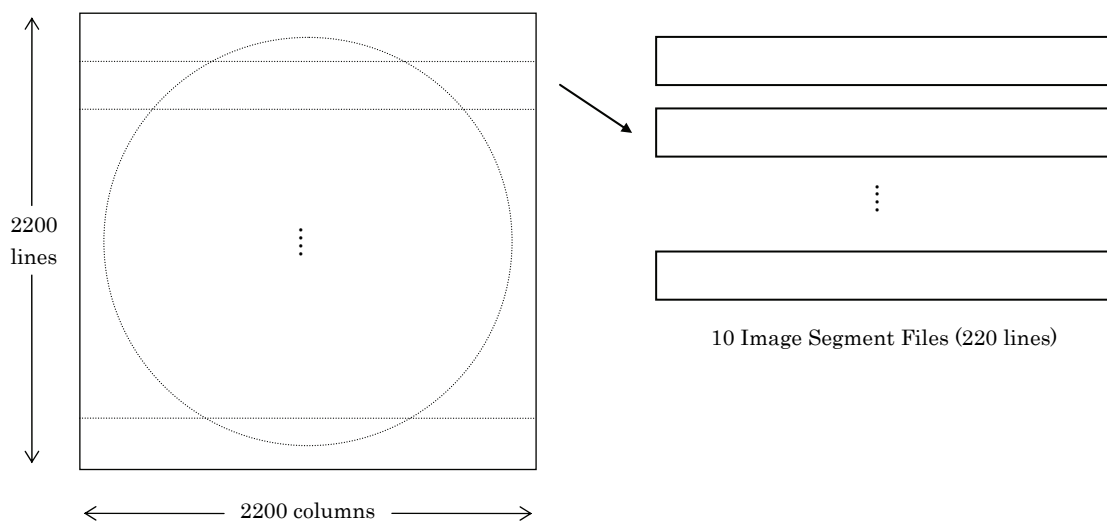

**Figure A-1      Segmentation of full Earth's disk**

The line direction will be from North to South and the column direction will be from West to East. The numbering of the image segment files will follow the line direction.


The number of bits per pixel is 8. One pixel count may be set to any decimal integer between 0 and 255 for infrared image data and between 0 and 63 for visible image data. For visible image data the count is expressed with 6 bits from bit number 2 to 7(LSB), the other 2 bits from bit number 0(MSB) to 1 set to 0.

Lossless compression is applied to the image data.

Spatial resolution of the image is around 5 km at the sub-satellite point.

Figure A-2 shows latitude/longitude lines and coast lines of geographical coordinate in the projection.

The projection parameters and the definition of count to physical value relation are described in the secondary header record of LRIT. For a description of the navigation function, refer to [AD.1, section 4.4].

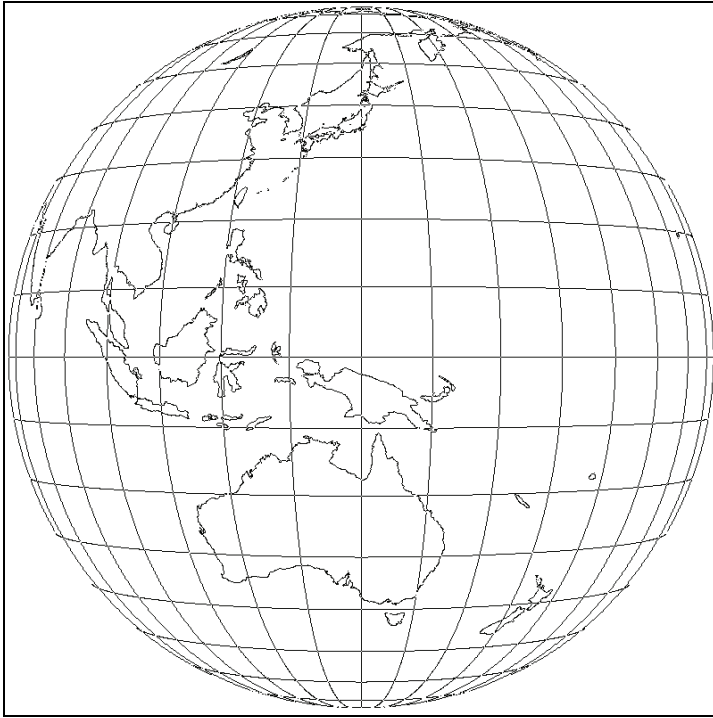

**Figure A-2**      **Full Earth's Disk of Normalized Geostationary Projection**

### A.1.2 Images of Polar-stereographic Projection


There are three different polar-stereographic projection areas which cover East Asia, the north-east of Japan and the south-west of Japan, respectively.

Figures A-3, A-4 and A-5 show latitude/longitude lines and coast lines in the projection covering East Asia, the north-east of Japan and the south-west of Japan respectively.


The image of polar-stereographic projection has a size of 800 lines x 800 pixels. The number of bits per pixel is 8 for all image data. One pixel count may be set to any decimal integer between 0 and 255 for infrared image data and between 0 and 63 for visible image data. For visible image data the count is expressed with 6 bits from bit number 2 to 7(LSB), the other 2 bits from bit number 0(MSB) to 1 set to 0. Lossy compression is applied to the image data.

Spatial resolution at the center of projection area is:  
around 6.4 km for the projection covering East Asia  
around 2.4 km for the projection covering the north-east of Japan  
around 2.1 km for the projection covering the south-west of Japan

The projection parameters and the definition of count to physical value relation are described in the secondary header record of LRIT. For a description of the navigation function, refer to [AD.1, section 4.4].

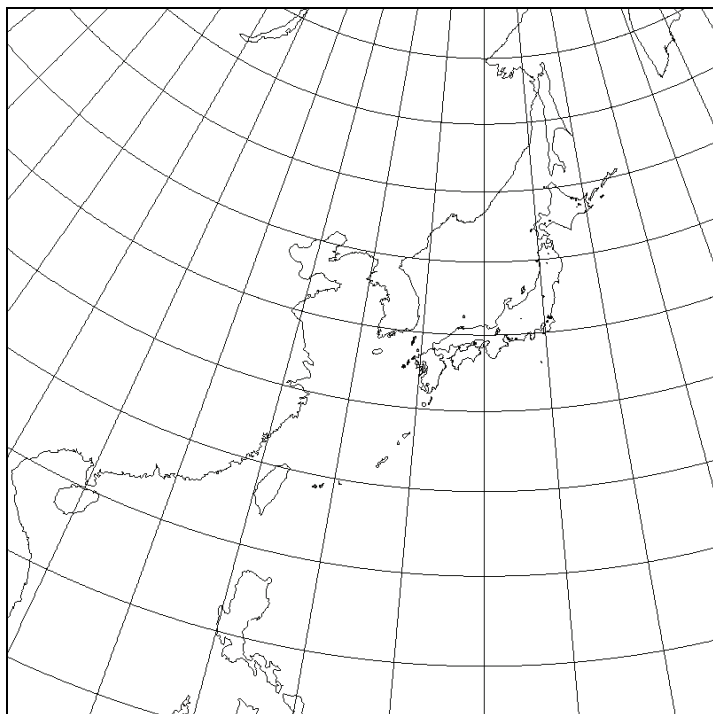

**Figure A-3**      **Polar-stereographic Projection covering East Asia**

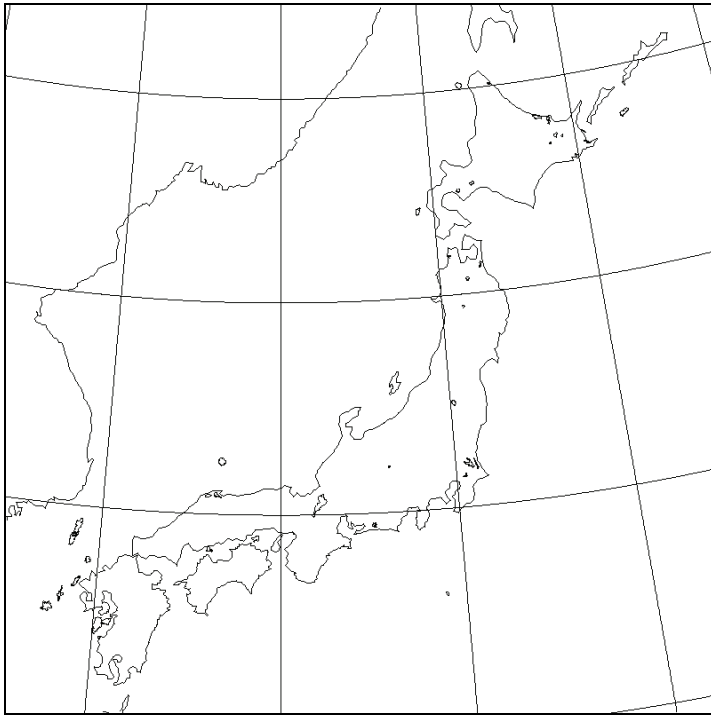

**Figure A-4** Polar-stereographic Projection covering the north-east of Japan



**Figure A-5** Polar-stereographic Projection covering the south-west of Japan

## A.2 Overlay

The overlay including latitude/longitude lines and coast lines consists of single bit plane compressed in lossless form. The overlay information is handled in the same manner as image data. The number of bits per pixel is 1. Zero represents the overlay to be off. One represents overlay condition. The corresponding projection and coverage information is defined in the secondary header record of LRIT.

Note that the JPEG lossless compression does not support compression of 1 bit per pixel image. Overlay data is treated as 8 bit per pixel data in compression process. Each pixel is formed by taking 8 consecutive pixels of overlay data (first pixel is MSB, last pixel is LSB). The number of lines is not changed.

The following overlay files will be disseminated periodically.

- Full Earth's disk image of normalized geostationary projection

The overlay for full Earth's disk image has a size of 2200 lines X 2200 pixels. No segmentation is applied to the overlay file.

Refer to Figure A-2 for latitude/longitude lines and coast lines in the normalized geostationary projection.

- Polar-stereographic projection

The overlay for polar-stereographic projection image has a size of 800 lines X 800 pixels. The overlays for three different projection areas covering East Asia, the north-east of Japan and the south-west of Japan will be provided.

Refer to Figures A-3, A-4 and A-5 for latitude/longitude lines and coast lines in the polar-stereographic projections.

## A.3 File Name

The file name of character strings is stored in the Annotation Header (Header Type #4).  
The name of image data files disseminated via LRIT is defined as follows:

| File Type | Product name                        |
|-----------|-------------------------------------|
| ffff      | as defined in the following section |
| 4 bytes   | max. 60 bytes                       |

**Table A-2**      **File name of image data**

### A.3.1 File Name of Image Data

The record of file name for Image Data is used as follows:

- File Type  
ffff : 'IMG\_' for image data

- Product name

| projection name | spectral channel | observation time | sequence number |
|-----------------|------------------|------------------|-----------------|
| pppp            | cccc             | YYYYMMDDhhmm     | Nnnn            |
| 4 bytes         | 4 bytes          | 12 bytes         | 4 bytes         |

pppp : 'DK01' for full Earth's disk of normalized geostationary projection  
'PS01' for polar-stereographic projection covering East Asia  
'PS02' for polar-stereographic projection covering the north-east of Japan  
'PS03' for polar-stereographic projection covering the south-west of Japan

cccc : 'VIS\_' for visible channel  
'IR1\_' for infrared channel 1 (11μm)  
'IR2\_' for infrared channel 2 (12 μm)  
'IR3\_' for infrared channel 3 (6.7μm)  
'IR4\_' for infrared channel 4 (3.7μm)

YYYYMMDDhhmm : YYYY=year, MM=month, DD=day of month, hh=hour, mm=minute

nnnn : '\_001'-'\_010' for segmented full earth's disk image data files  
Sequence number is set only for dissemination of the segment files.

e.g. IMG\_DK01IR1\_200012312332\_001

segment image data file #1 of full Earth's disk of normalized geostationary projection for infrared channel 1 observed at 2332 UTC on December 31, 2000.

### A.3.2 File Name of Overlay Data

The record of file name for Overlay Data is used as follows:

- File Type

ffff : 'OVL\_' for overlay data

- Product name

|                 |
|-----------------|
| projection name |
| pppp            |
| 4 bytes         |

pppp :  
'DK01' for full Earth's disk of normalized geostationary projection  
'PS01' for polar-stereographic projection covering East Asia  
'PS02' for polar-stereographic projection covering the north-east of Japan  
'PS03' for polar-stereographic projection covering the south-west of Japan

e.g. OVL\_DK01

overlay data file of full Earth's disk of normalized geostationary projection.

## APPENDIX B - MTSAT LRIT SATELLITE TO GROUND INTERFACE

### B.1 Communication Link Parameters

Parameters of communication link are specified as follows.

**Table B.1          Parameters of MTSAT LRIT communication link**

| Parameters                            |                                                                                     |
|---------------------------------------|-------------------------------------------------------------------------------------|
| Center Frequency                      | 1691.0MHz                                                                           |
| EIRP                                  | 25.0 dBw                                                                            |
| Polarization                          | Linear (Perpendicularity to orbital plane)                                          |
| Band width (99% of total power)       | 250 KHz                                                                             |
| Pulse shaping                         | Root Raised cosine, roll-off factor $\alpha = 0.5$                                  |
| Total coded data rate                 | 150 Ksps                                                                            |
| Modulation                            | PCM/NRZ-M/BPSK                                                                      |
| Coding                                | concatenated coding<br>Reed-Solomon(255,223) + convolutional coding (1/2 rate, k=7) |
| Packetized data rate (on CVCDU level) | 75 Kbps                                                                             |
| Length of coded CVCDU                 | 1020 octets                                                                         |

## APPENDIX C - LIST OF ABBREVIATIONS

|       |                                                   |
|-------|---------------------------------------------------|
| AOS   | Advanced Orbiting Systems                         |
| APID  | Application Process Identifier                    |
| ASM   | Attached Synchronization Marker                   |
| BER   | Bit Error Rate                                    |
| CADU  | Channel Access Data Unit                          |
| CVCDU | Coded VCDU                                        |
| CCSDS | Consultative Committee for Space Data Systems     |
| CGMS  | Co-ordination Group for Meteorological Satellite  |
| DCT   | Discrete Cosine Transformation                    |
| DEC   | Decryption Process                                |
| DES   | Data Encryption Standard                          |
| DHT   | Define Huffman Table (JPEG marker)                |
| DQT   | Define Quantization Table (JPEG marker)           |
| Eb/No | Bit Energy/Noise Density                          |
| ECB   | Electronic Code Book (DES mode)                   |
| ENC   | Encryption Process                                |
| FEC   | Forward Error Correction                          |
| GMS   | Geostationary Meteorological Satellite            |
| GRIB  | WMO standard for the coding of binary information |
| GTS   | Global Telecommunication System                   |
| HRIT  | High Rate Information Transmission                |
| ISO   | International Organization for Standardization    |
| JPEG  | Joint Photographic Expert Group                   |
| LRIT  | Low Rate Information Transmission                 |
| LSB   | Least Significant Bit                             |
| MSB   | Most Significant Bit                              |
| OSI   | Open Systems Interconnection                      |
| RF    | Radio Frequency                                   |
| S/C   | Spacecraft                                        |
| SDUS  | Small-scale Data Utilization Station              |
| SKU   | Station Key unit                                  |
| SOF   | Start of Frame (JPEG marker)                      |
| SOS   | Start of Scan (JPEG marker)                       |
| TBC   | To Be Confirmed                                   |
| TBD   | To Be Defined                                     |
| UBM   | User Station Baseband Module                      |
| USK   | User Station Key                                  |
| VCA   | Virtual Channel Access                            |
| VCLC  | Virtual Channel Link Control                      |
| VCDU  | Virtual Channel Data Unit                         |
| WMO   | World Meteorological Organization                 |

## APPENDIX D - LIST OF TBDS AND TBCS

**TBDs**

**TBCs**